

Increased Safety

For use in IEC governed hazardous areas. Polyamide is not recognized for use in any NEC/CEC governed hazardous areas.

ATEX:

Zone 1 and 2 – 21 and 22

II 2 GD

Ex de IIC/Ex demb IIC/Ex tD A21

IP66 – IK09

Applications

- For use in IEC governed hazardous areas. Polyamide is not recognized for use in any NEC/CEC governed hazardous areas.
- Local control stations and motor control stations for use in hazardous areas covering the broadest possible range of applications.
- Control of equipment at:
 - Power plants
 - Chemical and petrochemical plants
 - Petroleum refineries
 - Reverse osmosis plants
 - Pulp and paper processing plants
 - Various industrial applications
- Push buttons and selector switches are used in conjunction with contactors or magnetic starters for remote control of motors in hazardous locations. They provide circuit control and/or selection.
- Pilot lights provide visual assurance that an electrical function is being performed at a remote or hazardous location.
- For use in washdown areas.

Features

- Employs Ex de method of protection which eliminates the need for external seals.
- Operators include push buttons, illuminated push buttons, selector switches, control and load break switches and LED pilot lights.
- Pilot light employs high intensity single LED with lifetime of 100,000 hours that can be used at:
 - 12 Vac to 254 Vac 50/60 Hz
 - 12 Vdc to 60 Vdc
- Up to 3 contact blocks per actuator can be used.
- Contact block technical data:
 - IEC rated operating voltage (Ue): 500 Vac – 110 Vdc
 - IEC switching capacity:
 - AC12: 16 Amp/400 Vac
 - AC14: 10 Amp/400 Vac
 - AC15: 6 Amp/500 Vac
 - DC13: 2 Amp/24 Vdc and 1 Amp/110 Vdc
 - NEMA switching capacity: A600: 10 Amp/600 Vac
- Selector switch technical data:
 - IEC rated operating voltage: 690 Vac
 - IEC rated operating current: maximum 16 Amp
 - IEC switching capacity:
 - AC1: 16 Amp/690 Vac
 - AC15: 16 Amp/415 Vac
 - AC3: 8 Amp/500 Vac
 - AC3: 4 Amp/690 Vac
 - AC3: 16 Amp/690 Vac
 - DC1: 10 Amp/24 Vdc
 - DC1: 6 Amp/60 Vdc
 - DC1: 6 Amp/110 Vdc (2 contacts wired in series)
 - DC1: 6 Amp/220 Vdc (3 contacts in series)
 - NEMA switching capacity: A600: 10 Amp/600 Vac
- Enclosures are rated for IP66 with firmly secured gasket.
- Operators and contact blocks are spaced for easy wiring.
- Wide selection of termination methods available.
- Choice of DIN rail mounted high performance contact block suitable for low intensity (less than 5 mA).



U43W2 VA13A5A9



U42W2 A5A9

- TS35 rail mounted components held securely in place during operation and easily removed for service.
- Brass Inserts are provided for TS35 DIN rails or mounting plate to be installed inside the enclosure.
- Captive, corrosion resistant stainless steel cover screws.

Standard Materials

- Body, cover, cable gland and blanking plug: polyamide, black finish
- Cover screws: stainless steel
- Optional nameplates: stainless steel

Accessories

- Key for changing actuator blocks.
- Guard for mushroom head actuator.
- Padlockable guard.
- M5 earth stud.
- Combination drain and breather available in brass, polyamide and stainless steel.

Options

- Nameplates: Lamacoid with different color combinations.
- Padlocking ability at left, center, right or any position on selector switches.
- Padlocking ability for momentary and maintained push buttons.
- Special contact arrangements available, see *Unicode 2 Series Customized Control Stations*.

Unicode™ 2 Series Polyamide Control Stations



Increased Safety

For use in IEC governed hazardous areas. Polyamide is not recognized for use in any NEC/CEC governed hazardous areas.

ATEX:

Zone 1 and 2 – 21 and 22

Ⓔ II 2 GD

Ex de IIC/Ex demb IIC/Ex tD A21

IP66 – IK09

ATEX Certifications and Compliances

- Certification Type PCe
 - Gas: Zone 1 and 2
 - Conforming to ATEX 94/9/CE: Ⓔ II 2 G
 - Type of Protection: Ex de IIC/Ex demb IIC (depending of the actuator)
 - Temperature Class: T6
 - Dust: Zone 21 and 22
 - Conforming to ATEX 94/9/CE: Ⓔ II 2 D
 - Type of Protection: Ex tD A21
 - Surface Temperature: T75 °C (T167 °F)
 - Ambient Temperature: -20 °C to +55 °C (-4 °F to +131 °F)
 - CE Declaration of Conformity: 50221
 - ATEX Certificate: LCIE 00 ATEX 6047
 - Index of Protection according EN/IEC 60529: IP66
 - Impact Resistance (shock): IK09

EURASEC Certification

- EURASEC RU C-FR T505.B.00911

Other Certification ①

- INMETRO Certificate: BVC 11.0640-X

CONTROLS: NEC/CEC, ATEX/IEC EX INCREASED SAFETY CONTROL STATIONS



① INMETRO certification available on special request only. Contact your local sales representative for more information.



Increased Safety

For use in IEC governed hazardous areas. Polyamide is not recognized for use in any NEC/CEC governed hazardous areas.

ATEX:

Zone 1 and 2 – 21 and 22

II 2 GD

Ex de IIC/Ex demb IIC/Ex tD A21

IP66 – IK09

Size 1 Polyamide Control Station:

Included: 1 white self-adhesive laminated plastic nameplate, 2 x M20 bottom clearance entries, 1 blanking plug, 1 cable gland in polyamide [Ø 6.5 mm to 14.5 mm (0.26" to 0.57")], 2 locknuts.



Description/Function	Diagram	Bottom Entries	Weight kg (lb)	Volume dm³ (in³)	Catalog Number
Momentary Push Button					
Green insert 'I' + red insert 'O' with 1NO + 1NC momentary contacts		2 x M20	0.48 (1.06)	2.5 (152.56)	U41W2A3
1x green push button "I" with 1NO momentary contact		2 x M20	0.48 (1.06)	2.5 (152.56)	U41W2A5
1x red push button "O" with 1NC momentary contact		2 x M20	0.48 (1.06)	2.5 (152.56)	U41W2A9
Emergency Stop					
Red mushroom head push-pull 1NC maintained contact		2 x M20	0.48 (1.06)	2.5 (152.56)	U41W2D9
Red mushroom head push-pull 1NO + 1NC maintained contacts		2 x M20	0.48 (1.06)	2.5 (152.56)	U41W2D3
Red mushroom head key release 1NC maintained contact		2 x M20	0.48 (1.06)	2.5 (152.56)	U41W2C9
Red mushroom head key release 1NO + 1NC maintained contacts		2 x M20	0.48 (1.06)	2.5 (152.56)	U41W2C3
Mushroom Head Push Button					
Black mushroom head push button 1NO + 1NC momentary contacts		2 x M20	0.48 (1.06)	2.5 (152.56)	U41W2B3
Red mushroom head push button 1NC momentary contact		2 x M20	0.48 (1.06)	2.5 (152.56)	U41W2R9
Key Push Button					
With key removable in both positions 1NO + 1NC maintained contacts		2 x M20	0.48 (1.06)	2.5 (152.56)	U41W2E3

Unicode™ 2 Series Polyamide Control Stations

Increased Safety

For use in IEC governed hazardous areas. Polyamide is not recognized for use in any NEC/CEC governed hazardous areas.

ATEX:

Zone 1 and 2 – 21 and 22
 II 2 GD
 Ex de IIC/Ex demb IIC/Ex tD A21
 IP66 – IK09

CONTROLS: NEC/CEC, ATEX/IEC/EX INCREASED SAFETY CONTROL STATIONS

Size 1 Polyamide Control Station:

Included: 1 white self-adhesive laminated plastic nameplate, 2 x M20 bottom clearance entries, 1 blanking plug, 1 cable gland in polyamide [Ø 6.5 mm to 14.5 mm (0.26" to 0.57")], 2 locknuts.




Description/Function	Diagram	Bottom Entries	Weight kg (lb)	Volume dm³ (in³)	Catalog Number
Pilot Light					
1x red pilot light ①		2 x M20	0.48 (1.06)	2.5 (152.56)	U41W2PR
1x green pilot light ①		2 x M20	0.48 (1.06)	2.5 (152.56)	U41W2PG
1x blue pilot light ①		2 x M20	0.48 (1.06)	2.5 (152.56)	U41W2PB
1x yellow pilot light ①		2 x M20	0.48 (1.06)	2.5 (152.56)	U41W2PY
1x white pilot light ①		2 x M20	0.48 (1.06)	2.5 (152.56)	U41W2PW

2-Position Selector Switch



2 fixed positions '0 - I'
 1NO + 1NC contacts




2 x M20 0.48 (1.06) 2.5 (152.56) U41W2H3

3-Position Selector Switch




3 fixed positions 'I - 0 - II'
 2NO contact




2 x M20 0.48 (1.06) 2.5 (152.56) U41W2J1

3 positions 'I - 0 - II'
 With spring return from I to 0
 1NO + 1NC contacts



2 x M20 0.48 (1.06) 2.5 (152.56) U41W2N3

3 positions 'I - 0 - II'
 With spring return from II to 0
 1NO + 1NC contacts



2 x M20 0.48 (1.06) 2.5 (152.56) U41W2M3

Size 2 Polyamide Control Station:

Included: 1 white self-adhesive laminated plastic nameplate, 2 x M20 bottom clearance entries, 1 blanking plug, 1 cable gland in polyamide [Ø 6.5 mm to 14.5 mm (0.26" to 0.57")], 2 locknuts.



Description/Function	Diagram	Bottom Entries	Weight kg (lb)	Volume dm³ (in³)	Catalog Number
Twin Push Button					
1x green push button 'I' with 1NO contact 1x red push button 'O' with 1NC contact Momentary contacts		2 x M20	0.62 (1.37)	2.5 (152.56)	U42W2A5A9
1x green push button 'I' with 1NO + 1NC contacts 1x red push button 'O' with 1NO + 1NC contacts Momentary contacts		2 x M20	0.62 (1.37)	2.5 (152.56)	U42W2A3A3

① 12 Vac to 254 Vac 50/60 Hz - 12 Vdc to 60 Vdc.

Unicode™ 2 Series Polyamide Control Stations

Increased Safety

For use in IEC governed hazardous areas. Polyamide is not recognized for use in any NEC/CEC governed hazardous areas.

ATEX:

Zone 1 and 2 – 21 and 22

II 2 GD















Ex de IIC/Ex demb IIC/Ex tD A21

IP66 – IK09

Size 2 Polyamide Control Station:

Included: 1 white self-adhesive laminated plastic nameplate, 2 x M20 bottom clearance entries, 1 blanking plug, 1 cable gland in polyamide [Ø 6.5 mm to 14.5 mm (0.26" to 0.57")], 2 locknuts.



Description/Function	Diagram	Bottom Entries	Weight kg (lb)	Volume dm³ (in³)	Catalog Number
Push Button + Push-Pull Emergency Stop					
 1x green push button 'I' with 1NO momentary contact 1x red mushroom head push-pull with 1NC maintained contact		2 x M20	0.62 (1.37)	2.5 (152.56)	U42W2A5D9
 1x green push button 'I' with 1NO + 1NC momentary contacts 1x red mushroom head push-pull with 1NO + 1NC maintained contacts		2 x M20	0.62 (1.37)	2.5 (152.56)	U42W2A3D3
Push Button + Push-Pull Emergency Stop					
 1x green light ① 1x green push button 'I' with 1NO Momentary contact		2 x M20	0.62 (1.37)	2.5 (152.56)	U42W2PGA5
 1x green light ① 1x green push button 'I' with 1NO + 1NC Momentary contacts		2 x M20	0.62 (1.37)	2.5 (152.56)	U42W2PGA3
 1x red light ① 1x red push button 'O' with 1NC Momentary contact		2 x M20	0.62 (1.37)	2.5 (152.56)	U42W2PRA9
 1x red light ① 1x red push button 'O' with 1NO + 1NC Momentary contacts		2 x M20	0.62 (1.37)	2.5 (152.56)	U42W2PRA3
Ammeter					
 1x ammeter 48 x 48 mm, (1.89" x 1.89") 1A C.T., 3 F.L.C., with 0 - 1 - 3 scale		2 x M20	0.56 (1.23)	2.5 (152.56)	U42W2VA13

① 12 Vac to 254 Vac 50/60 Hz - 12 Vdc to 60 Vdc.

Unicode™ 2 Series Polyamide Control Stations

Increased Safety

For use in IEC governed hazardous areas. Polyamide is not recognized for use in any NEC/CEC governed hazardous areas.

ATEX:

Zone 1 and 2 – 21 and 22

II 2 GD

Ex de IIC/Ex demb IIC/Ex tD A21













IP66 – IK09

CONTROLS: NEC/CEC, ATEX/IECEx INCREASED SAFETY CONTROL STATIONS

Size 3 Polyamide Control Station:

Included: 1 white self-adhesive laminated plastic nameplate, 2 x M20 bottom clearance entries, 1 blanking plug, 1 cable gland in polyamide [Ø 6.5 mm to 14.5 mm (0.26" to 0.57")], 2 locknuts.



Description/Function	Diagram	Bottom Entries	Weight kg (lb)	Volume dm³ (in³)	Catalog Number
Twin Push Buttons + Push-Pull Emergency Stop					
 <ul style="list-style-type: none"> 1x green push button 'I' with 1NO contacts 1x red push button 'O' with 1NC contact Momentary contacts 1x red mushroom head push-pull emergency button with 1NO + 1NC maintained contacts 		2 x M20	0.78 (1.72)	2.5 (152.56)	U43W2A5A9D3
 <ul style="list-style-type: none"> 1x green push button 'I' with 1NO + 1NC contacts 1x red push button 'O' with 1NO + 1NC contacts Momentary contacts 1x red mushroom head push-pull emergency button with 1NO + 1NC maintained contacts 		2 x M20	0.78 (1.72)	2.5 (152.56)	U43W2A3A3D3
Pilot Light + Twin Push Buttons					
 <ul style="list-style-type: none"> 1x green light ① 1x green push button 'I' with 1NO contact 1x red push button 'O' with 1NC contact Momentary contacts 		2 x M20	0.78 (1.72)	2.5 (152.56)	U43W2PGA5A9
 <ul style="list-style-type: none"> 1x red light ① 1x green push button 'I' with 1NO contact 1x red push button 'O' with 1NO contact Momentary contacts 		2 x M20	0.78 (1.72)	2.5 (152.56)	U43W2PRA5A9
 <ul style="list-style-type: none"> 1x green light ① 1x green push button 'I' with 1NO + 1NC contacts 1x red push button 'O' with 1NO + 1NC contacts Momentary contacts 		2 x M20	0.78 (1.72)	2.5 (152.56)	U43W2PGA3A3
 <ul style="list-style-type: none"> 1x red light ① 1x green push button 'I' with 1NO + 1NC contacts 1x red push button 'O' with 1NO + 1NC contacts Momentary contacts 		2 x M20	0.78 (1.72)	2.5 (152.56)	U43W2PRA3A3

① 12 Vac to 254 Vac 50/60 Hz - 12 Vdc to 60 Vdc.

Increased Safety

For use in IEC governed hazardous areas. Polyamide is not recognized for use in any NEC/CEC governed hazardous areas.

ATEX:

Zone 1 and 2 – 21 and 22

II 2 GD







Ex de IIC/Ex demb IIC/Ex tD A21

IP66 – IK09

Size 3 Polyamide Control Station:

Included: 1 white self-adhesive laminated plastic nameplate, 2 x M20 bottom clearance entries, 1 blanking plug, 1 cable gland in polyamide [Ø 6.5 mm to 14.5 mm (0.26" to 0.57")], 2 locknuts.



Description/Function	Diagram	Bottom Entries	Weight kg (lb)	Volume dm³ (in³)	Catalog Number
Ammeter + Twin Push Button					
 <p>1x ammeter 1.89 x 1.89 in/48 x 48 mm, 1A C.T., 3 F.L.C., with 0 - 1 - 3 scale 1x green push button 'I' with 1NO contact 1x red push button 'O' with 1NC contact Momentary contacts</p>		2 x M20	0.80 (1.76)	2.5 (152.56)	U43W2VA13A5A9
Ammeter + 3-Position Selector Switch					
 <p>1x ammeter 1.89 x 1.89 in/48 x 48 mm, 1A C.T., 3 F.L.C., with 0 - 1 - 3 scale 1x 3-position selector switch 'I - 0 - II' with spring return from II to 0 1NO + 1NC contacts</p>		2 x M20	0.80 (1.76)	2.5 (152.56)	U43W2VA13M3
Special Accessories for Polyamide Enclosure					
 <p>Brass Earthing Plate for 2 x M20 Equipped with 2 earth connections</p>					098661
 <p>Tube or Frame Fixing FOR SIZE 1 ONLY For all tube diameter ≥ 80 mm (3.15") Using a metal strip (not supplied) maximum width 22 mm (0.87")</p>					098656

Unicode™ 2 Series Polyamide Control Station Accessories



Increased Safety

For use in IEC governed hazardous areas. Polyamide is not recognized for use in any NEC/CEC governed hazardous areas.

ATEX:

Zone 1 and 2 – 21 and 22
 II 2 GD
 Ex de IIC/Ex demb IIC/Ex tD A21
 IP66 – IK09

Nameplates — Set of 10

Blank self-adhesive, laminated plastic 58 mm x 18 mm (2.29" x 0.71").

Color	Catalog Number	Pack
White (black letters)	UNPW	1
Yellow (black letters)	UNPY	1
Red (white letters)	UNPR	1
Blue (white letters)	UNPB	1
Black (white letters)	UNPN	1
Green (white letters)	UNPG	1

Inserts for Push Button — Set of 5

Marking	Color	Catalog Number	Pack
(unmarked)	Green	UIAG	1
(unmarked)	Red	UIAR	1
(unmarked)	Yellow	UIAY	1
(unmarked)	White	UIAW	1
(unmarked)	Blue	UIAB	1
(unmarked)	Black	UIAN	1
ON	Green	UIA01	1
OFF	Red	UIA02	1
START	Green	UIA03	1
STOP	Red	UIA04	1
MARCHE	Green	UIA05	1
ARRET	Red	UIA06	1
I	Green	UIA07	1
O	Red	UIA08	1

Inserts for Illuminated Push Button — Set of 5

Marking	Color	Catalog Number	Pack
(unmarked)	Green	UILG	1
(unmarked)	Red	UILR	1
(unmarked)	Yellow	UILY	1
(unmarked)	White	UILW	1
(unmarked)	Blue	UILB	1
ON	Green	UIL01	1
OFF	Red	UIL02	1
START	Green	UIL03	1
STOP	Red	UIL04	1
MARCHE	Green	UIL05	1
ARRET	Red	UIL06	1
I	Green	UIL07	1
O	Red	UIL08	1


Spare Key

For all key-operated buttons.

Description	Catalog Number	Pack
Spare key type 4 A 185	SK4A185	1

Standard Legend Plates

Two sizes available. Self-adhesive yellow laminated plastic (black lettering).

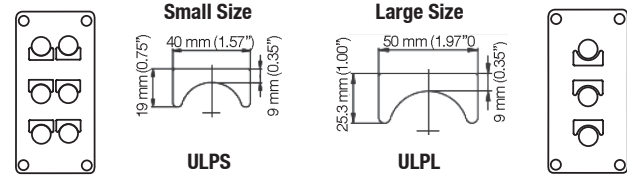

Text	Catalog Number		
	Small	Large	Pack
Blank (set of 10)	ULPS	ULPL	1
ON	ULPSA01	ULPLA01	1
OFF	ULPSA02	ULPLA02	1
FORWARD	ULPSA03	ULPLA03	1
REVERSE	ULPSA04	ULPLA04	1
JOG	ULPSA05	ULPLA05	1
RUN	ULPSA06	ULPLA06	1
START	ULPSA07	ULPLA07	1
STOP	ULPSA08	ULPLA08	1
UP	ULPSA09	ULPLA09	1
DOWN	ULPSA10	ULPLA10	1
FAST	ULPSA11	ULPLA11	1
SLOW	ULPSA12	ULPLA12	1
RAISE	ULPSA13	ULPLA13	1
LOWER	ULPSA14	ULPLA14	1
OPEN	ULPSA15	ULPLA15	1
CLOSE	ULPSA16	ULPLA16	1
LOW	ULPSA17	ULPLA17	1
HIGH	ULPSA18	ULPLA18	1
TEST	ULPSA19	ULPLA19	1
RESET	ULPSA20	ULPLA20	1
EMERGENCY STOP	ULPSA21	ULPLA21	1
MARCHE	ULPSA22	ULPLA22	1
ARRET	ULPSA23	ULPLA23	1
ARRET D'URGENCE	ULPSA24	ULPLA24	1
HAUT	ULPSA25	ULPLA25	1
BAS	ULPSA26	ULPLA26	1
O - I	ULPSH01	ULPLH01	1
ON - OFF	ULPSH02	ULPLH02	1
START - STOP	ULPSH03	ULPLH03	1
STOP - START	ULPSH04	ULPLH04	1
HAND - AUTO	ULPSH05	ULPLH05	1
MANU - AUTO	ULPSH06	ULPLH06	1
FORWARD - REVERSE	ULPSH07	ULPLH07	1
REMOTE - LOCAL	ULPSH08	ULPLH08	1
MARCHE - ARRET	ULPSH09	ULPLH09	1
I - O - II	ULPSJ01	ULPLJ01	1
OFF - O - ON	ULPSJ02	ULPLJ02	1
START - NORMAL - STOP	ULPSJ03	ULPLJ03	1
HAND - OFF - AUTO	ULPSJ04	ULPLJ04	1
MANU - O - AUTO	ULPSJ05	ULPLJ05	1
FORWARD - OFF - REVERSE	ULPSJ06	ULPLJ06	1
LOCAL - REMOTE - AUTO	ULPSJ07	ULPLJ07	1
LOCAL - O - REMOTE	ULPSJ08	ULPLJ08	1
MARCHE - NORMAL - ARRET	ULPSJ09	ULPLJ09	1



Increased Safety

For use in IEC governed hazardous areas. Polyamide is not recognized for use in any NEC/CEC governed hazardous areas.










ATEX:

Zone 1 and 2 – 21 and 22

II 2 GD

Ex de IIC/Ex demb IIC/Ex tD A21

IP66 – IK09

	Description	Catalog Number
	Additional Contacts <i>Each actuator is capable of activating 3 contacts.</i> <i>Exception: Illuminated push button and all actuators with key: 2 contacts maximum</i> 1NO contact 1NC contact	UCB5R UCB9R
	Yellow Guard Mushroom head protection for emergency stop	098657
	Padlockable Guard <i>Stainless steel and plastic cover, capacity: 3 padlocks diameter 6 mm (0.24") maximum (not supplied)</i> For push button and rotary actuator For mushroom head actuator	UPLD1S UPLD2S
	Cable Gland Exe <i>For unarmored cable Exe - IP66 - in polyamide entry thread seal</i> M20 (capacity 6.5-14.5 mm)	095605
	<i>For armored cable Exe/Exd - IP66 - in nickel plated brass (without entry thread seal)</i> Braid and Tape type: M20 (inner: 6.4-14.0/outer: 12.5-20.9 mm) Single Wired Armor (SWA): M20 (inner: 6.4-14.0/outer: 12.5-20.9 mm)	20E1FX5 20E1FW5
	Adaptors <i>Exd/Exe - IP66 in nickel plated brass (without entry thread seal)</i> Male M20 - Female 1/2" NPT Male M20 - Female 3/4" NPT	737DM2T15 737DM2T25
	Entry Thread Seal M20 (in white nylon)	20ETS2
	Combination Drain and Breather <i>Exe - IP66 - supplied with entry thread seal and locknut</i> M20 male thread in Polyamide M20 male thread in Brass M20 male thread in Stainless Steel	DBE20P DBE20B DBE20S
	Feed-Thru Earth Stud Terminal <i>Exe - IP66 - supplied with weatherproof seal and green/yellow earth conductor — 300 mm (11.81") length</i> M20 with M5 earth and 2.5 mm² (0.004 in²) conductor	PREESTM20

CONTROLIN: NEC/CEC, ATEX/IEC EX INCREASED SAFETY CONTROL STATIONS

Appleton®

Unicode™ 2 Series Polyamide Control Stations

Increased Safety

For use in IEC governed hazardous areas. Polyamide is not recognized for use in any NEC/CEC governed hazardous areas.

ATEX:

Zone 1 and 2 – 21 and 22


II 2 GD

Ex de IIC/Ex demb IIC/Ex tD A21


IP66 – IK09

CONTROLS: NEC/CEC, ATEX/IEC/EX INCREASED SAFETY CONTROL STATIONS


Dimensions in Millimeters (Inches)

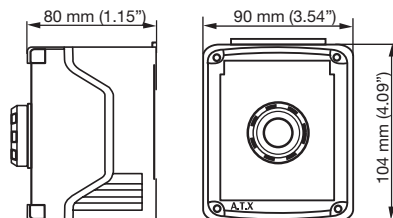


Size 1 Enclosure




Size 1 Mounting/Fixing Details



Size 2 Enclosure



Size 2 and 3 Mounting/Fixing Details



Size 3 Enclosure