

Datasheet

- CSA/PTB Certified for the German Eichrecht Standards
- MID Certified according to class B EN 50470-3
- Import/Export energy
- Dot Matrix LCD backlit Display
- Operation temperature -25°C to +70°C
- RS485 Modbus RTU communication
- Support OCMF communication protocol
- 4 DIN modules
- Max Current 100A
- Easy to use PC software tool
- Charge Control information
 1. Status of Charging station
 2. Charging Duration
 3. Consumption
 4. Charge-Point-Identification



The SDM630-EV has been designed specifically for use within the Electric-Vehicle infrastructure. Featuring high temperature operation and digital signing for charging events. the characteristics of single phase two wires (1p2w) and three phase four wires(3p4w) supplies, including voltage, frequency, current, power, power factor, active and reactive energy, imported or exported. Energy is measured in terms of kWh and kVAh. Maximum demand on power and current can be measured over pre-set periods of up to 60 minutes. SDM630-EV supports max.100A direct loads per phase, with dual tariff management availability. The meter is designed for DIN-rail mounting, with IP51 front protection. The meter is optionally equipped with pulse outputs, RS485 Modbus port.

Specification table

Specification	
Power	self-power supply (via measured voltage)
Consumption	<1W, 10VA
basic current	10A
Max.current	100A
Min.current	0.5A
Starting current	0.02A
Over-current	30x I _{max} for 0.01s
L-N voltage	100 to 289V a.c. (not for 3P3W supplies)
L-L voltage	173 to 500V a.c.(3P3W supplies only)
Frequency	50Hz(MID version) 50/60Hz(non-MID version)
Accuracy	
Active energy	Class 1(IEC62053-21)/Class B(IEC50470-1/3)
Reactive energy	Class 2(IEC62053-23)
Voltage	0.5% of range maximum
Current	0.5% of nominal
Frequency	0.2% of mid-frequency
Power factor	1% of unity(0.01)
Active power(W)	±1% of range maximum Reactive power(VAr)±1% of range maximum
Apparent power(VA)	±1% of range maximum

Environment specifications	
Operating temperature	-25°C to +55°C -40°C to + 70°C(optional)
Storage temperature	-40°C to + 70°C
Relative humidity	≤95%
Altitude	Up to 2000m
Mechanical environment	M2
Electromagnetic environment	E2

2 Modbus RS485 port outputs

1st Modbus output	
Baud rate (1st port)	2400,4800,9600(default),19200,38400
Parity	none/odd/even
Stop bits	1 or 2
RS485 address	001 to 247
Respond time	100mS
Transmission distance	1000m
2nd Modbus output(fixed)	
	baud rate 9600, Parity none, Stop bit 1

Mechanics specification

DIN rail dimensions	100x72x66mm (HxWxD)
Mounting	DIN Rail 35mm
Ingress protection	IP51 front panel (indoor)
Material	Self-extinguishing UL94 V-0
Weight	315g


For more information on these products, please contact our sales team on 0203 758 3494 or email sales@eastroneurope.com

www.eastroneurope.com


Datasheet_June2022

Datasheet

Wiring Configuration

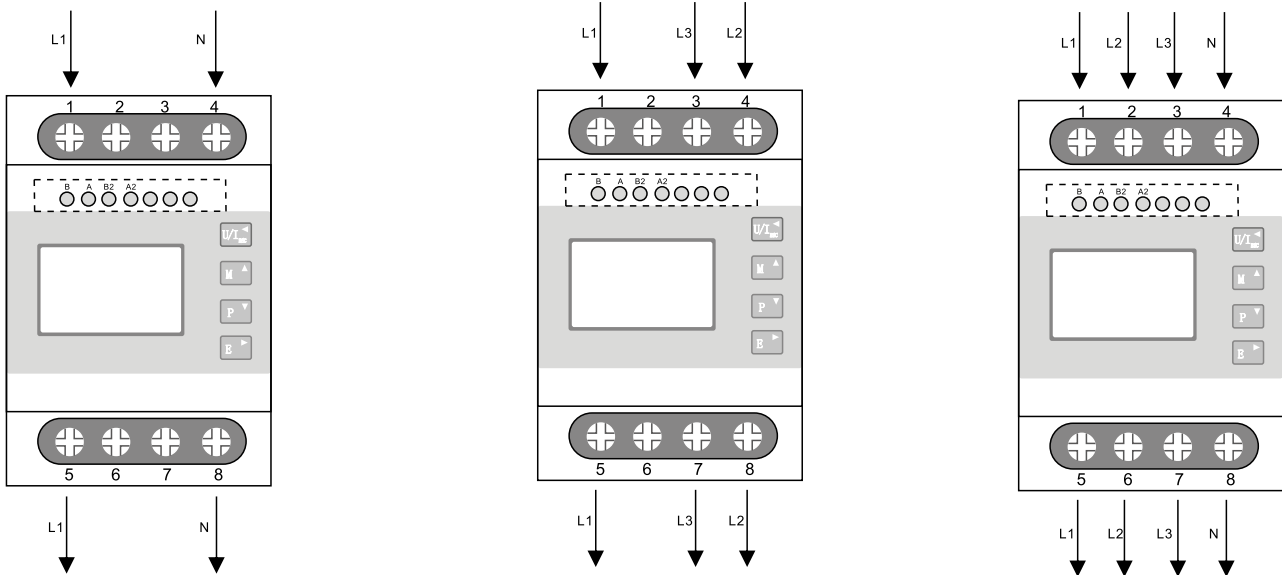

Dimension Drawing

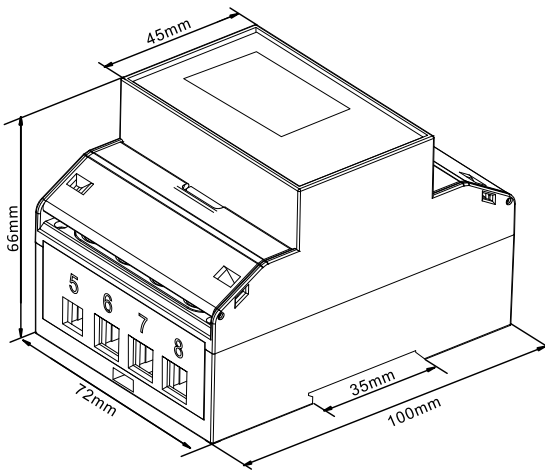

For more information on these products, please contact our sales team on 0203 758 3494 or email sales@eastroneurope.com

www.eastroneurope.com

Datasheet_June2022