


Key Features

Warranty : 10 years

700mm Version

1300mm Version

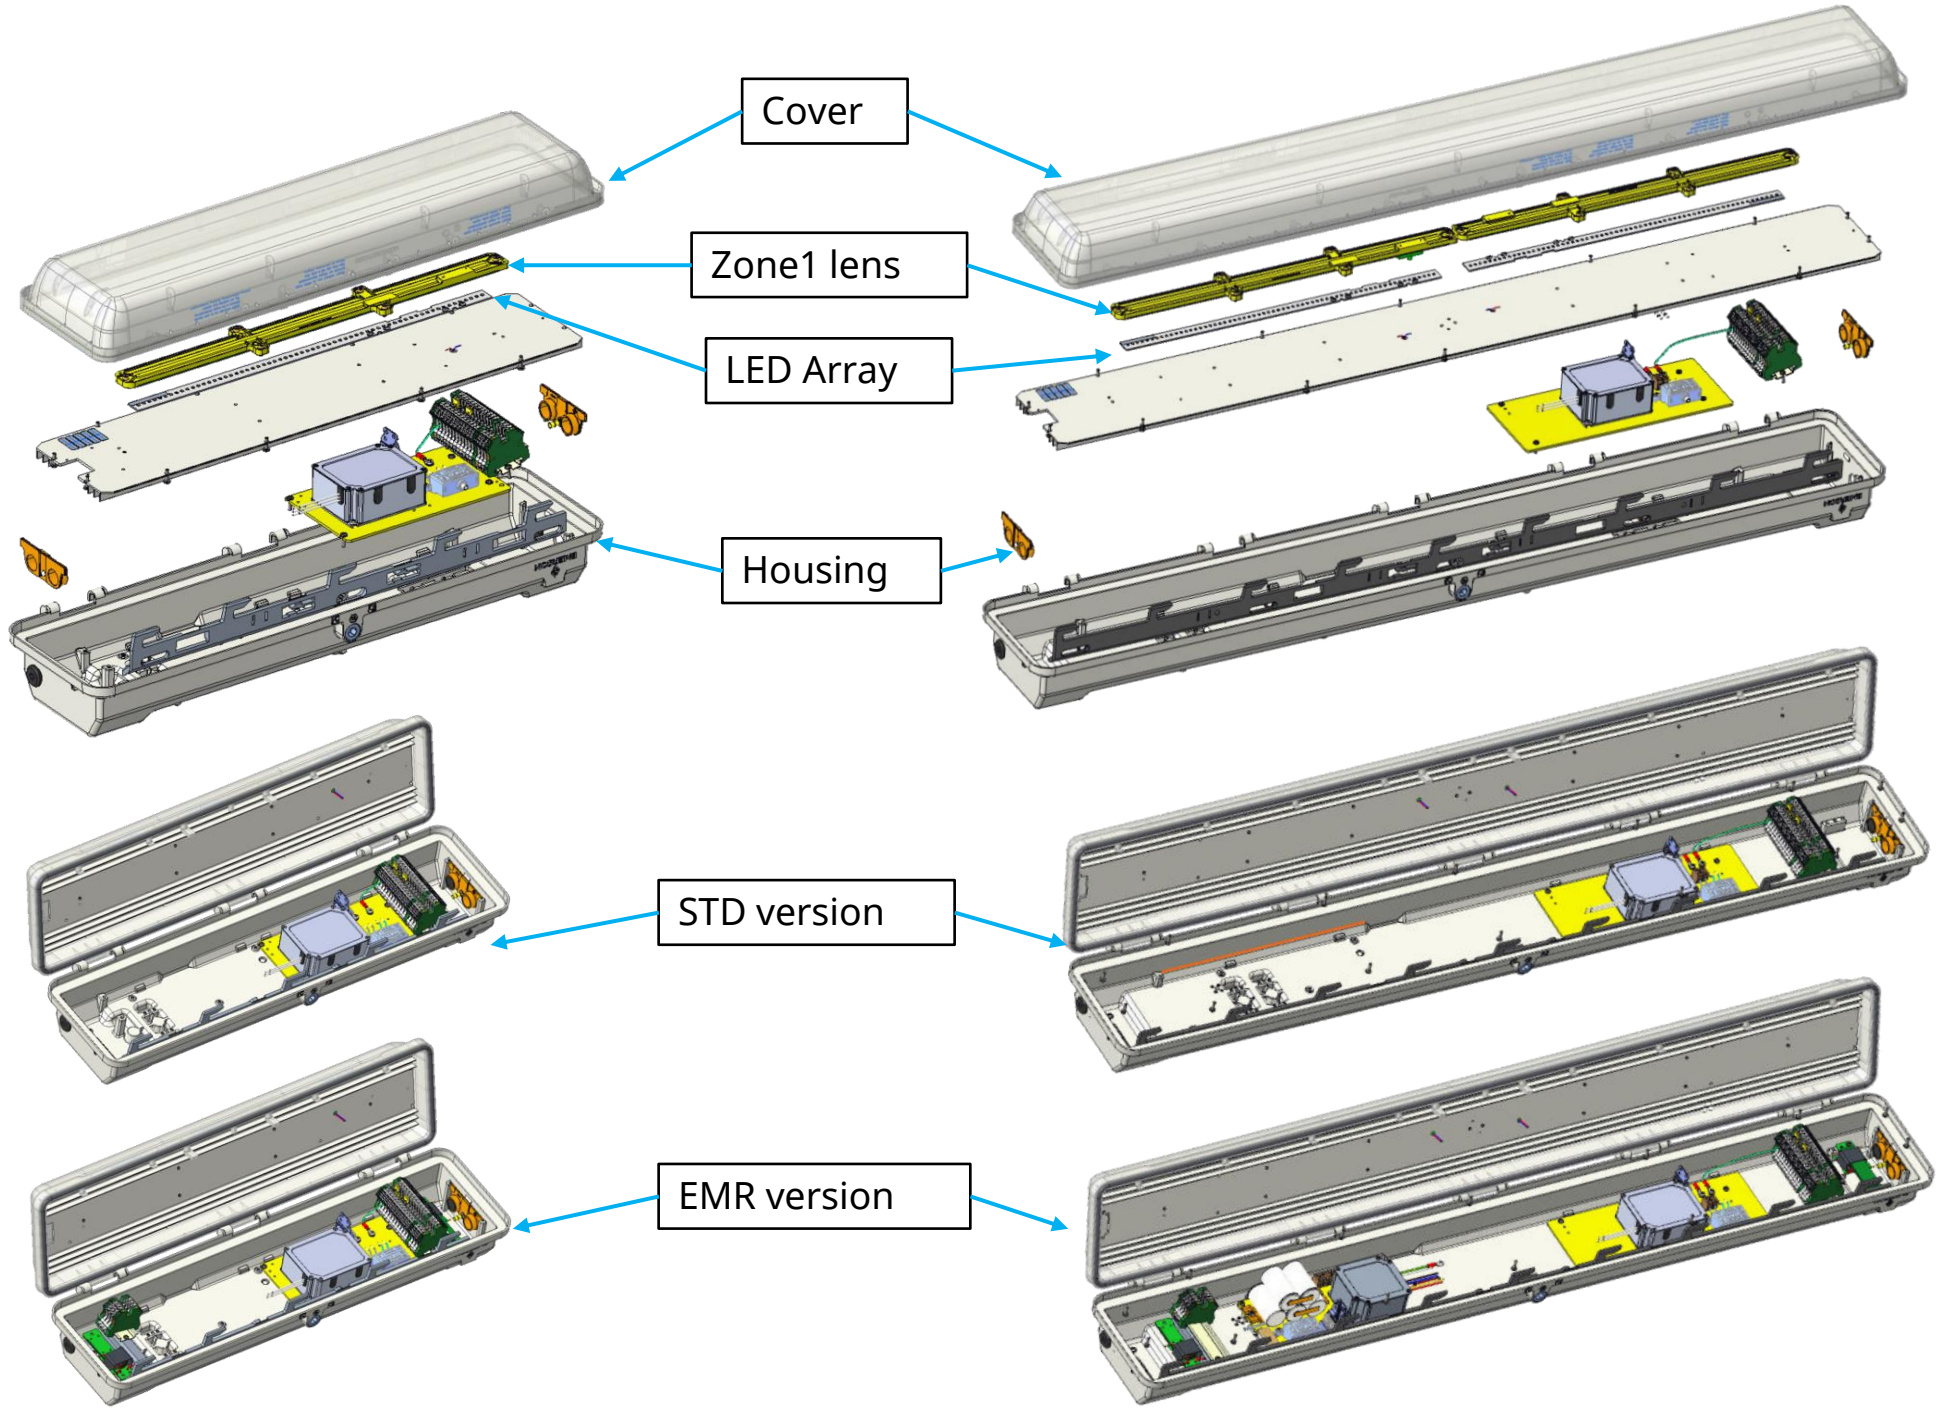

Technical Overview		
Version	FELED	Linmaster Z1
Qualifier	Good	Best
Efficacy	94 LPW	~129 LPW ✓
Drivers Qty	2 (7K lm)	1 ✓
Ambient temp.	-30°C to +55°C	-40°C up to +65°C ✓
Temperature Class	T4 @ +55 °C	T4 @ +65 °C ✓
Lumens platforms	3klm,4klm,5klm,7klm	3klm,4klm,5klm, 6klm ,7klm
Color temperatures CCT	5000K, 4000K	5000K, 4000K, 3000K , 2200K ✓
Green color for safety showers	No	Yes ✓
0-10V Dimming	No	Yes ✓
Vibration rating	No	3G ✓
Safety cable retention point	No	Yes ✓
Weight (kg)	1395mm – 8.5 785mm – 4.5	1300mm - 9 700mm - 5 ✓
Emergency battery options	E:180min (maintained)	R: 90 min (non-maintained) H: 90 min (maintained) E: 180 min (maintained) ✓
Input Voltage	BU - 120 to 277 Vac, 50/60 Hz; 125-300 Vdc	BU - 100 to 277 Vac, 50/60 Hz; 125-300 Vdc B2 - 24-48 Vdc ✓
Size (mm) L x W x H	1390 x 217 x 145 785 x 217 x 145	1300 x 200 x 125 700 x 200 x 125